StarBoard Link EZ

# Modular Interactive Whiteboard System

StarBoard Link EZ turns any dry erase board or surface into a fully functioning Interactive Whiteboard!

Easy to set up, easy to use. Attach your StarBoard Link EZ system to any flat surface, connect it to a computer, connect the computer to a projector, a quick set-up routine and you are ready to start teaching with a fully functioning IWB.

Easy installation
StarBoard Link EZ secures to any flat surface in minutes to transform a static wall into an interactive environment.

Finger-driven technology
Use your finger, stylus or any object to easily navigate through activities, websites, and multi-media content.
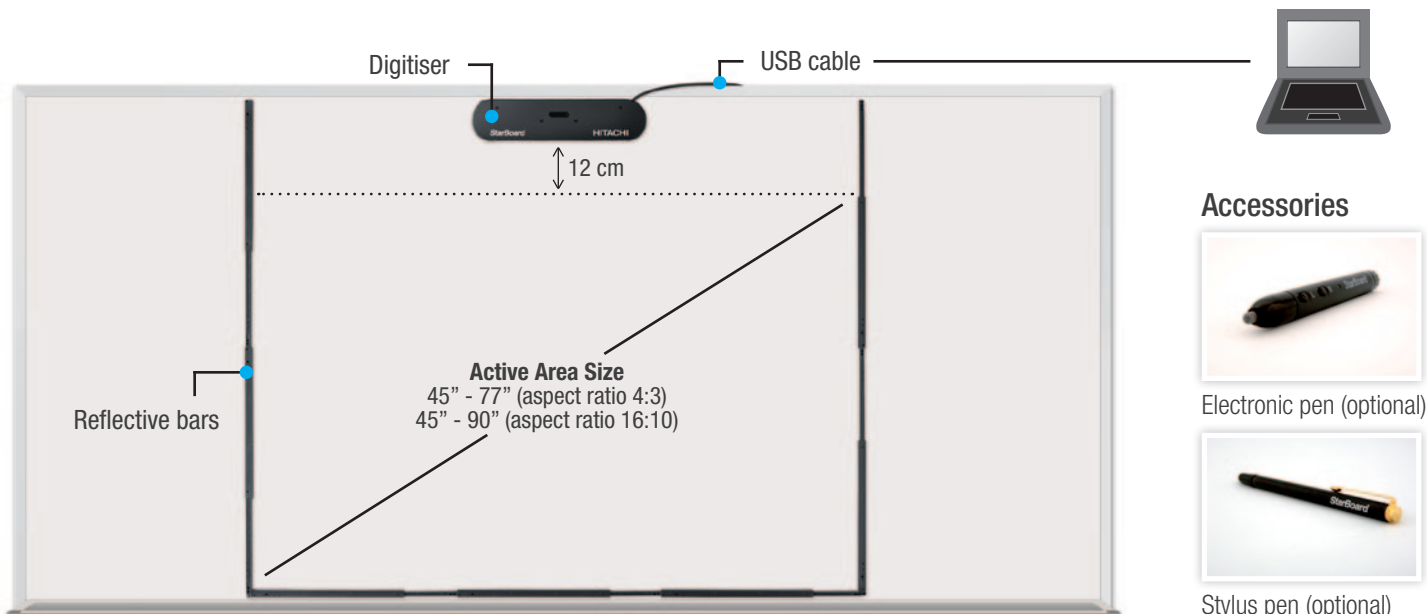
Flexible active area
The size of active area is adjustable - from 45" if the surface is limited, to 90" for the rooms where a bigger size of projection and work space is required.

Multi-touch hand gestures
Use your finger to annotate, fist to scroll and two fingers to erase or zoom in and out.

StarBoard *Link EZ*

Digitiser — USB cable

12 cm

Active Area Size
45" - 77" (aspect ratio 4:3)
45" - 90" (aspect ratio 16:10)

Reflective bars

Accessories

Electronic pen (optional)

Stylus pen (optional)

The full version of StarBoard Software is included with the purchase of every Hitachi StarBoard

- Support of different OS: Windows, Mac, Linux;
- Customisable floating toolbar;
- Hand writing recognition;
- Direct access to the Internet, Google image search;
- Import Microsoft Office files (Word, PPT...);
- Remote conferencing;
- Supports IWB Common File Format (CFF) for easy sharing of educational content.

Product Specifications

Hardware Specification

Model Name
StarBoard Link EZ

Model No.
AH00292

Digitising Technology
Infrared Image Sensor System

Interface to Computer
USB 1.1, 2.0 (cable length: 7.0 m)

Active Area Size
45" - 77" (aspect ratio 4:3)
45" - 90" (aspect ratio 16:10)

Coordinate Resolution
Approx. 0.05 mm

Tracking Speed
Approx. 100 points/sec

Digitiser Dimensions
510(W) × 124(H) × 38.5(D) mm
20.1(W) × 4.9 (H) × 1.5(D) inches

Reflective Bars Dimensions
464 – 733(W) × 23(H) × 21(D) mm
18.2 – 28.8(W) × 0.9 (H)× 0.83 (D) inches

Weight
Approx. 1.5 kg (3.3 lbs)
(Digitiser: 0.8kg (1.76 lbs), Reflective bars: 0.7kg (1.54 lbs))

Packing Dimensions
260 x 540 x 150 mm
10.3 x 21.3 x 6 inches

Packing Weight
Approx. 3.5kg (7.8 lbs)

Operating Specification
+5 - +35 °C (41 – 95 °F), 20-80% Humidity

Storage Specification
-10 - +45 °C (14-113 °F), 20-80% Humidity

Power Consumption
5V 500mA (USB Bus Power)

Certificates
VCCI Class A, FCC Class B, CE

Software Requirements*
* Based on StarBoard Software 9.3

PC Requirements
OS: MS Windows XP (32 bit) / Vista / 7 (32/64bit), latest service pack must be applied (Tablet PC and
Server Edition are currently not supported);
CPU: Intel Pentium 4 1.8GHz or higher;
RAM: 1 GB or more is recommended;
HDD: 600 MB of free space;
Display Color Depth: 16bit or more.

Mac Requirements
OS: Mac X 10.5 / 10.6;
CPU: IntelR processor;
RAM: 1 GB or more is recommended;
HDD: 600 MB of free space;
Display Color Depth: 16bit or more.

Linux Requirements
OS: Ubuntu 9.04 (linux-kernel-2.6.28-19-generic), Ubuntu 10.04 (linux-kernel-2.6.32-30-generic), openSUSE 11.1 (linux-kernel-2.6.27.56-0.1-default), Debian GNU/Linux 5.0 (linux-kernel-2.6.26-2), (Only 32bit version is supported);
CPU: Intel Core2 Duo 2.4GHz;
RAM: 1 GB or more;
HDD: 500 MB of free space;
Display Color Depth: 16bit or more.

Authorized distributor / reseller

Hitachi sets
"Environmental Vision 2025"
www.hitachi.com/environment/

StarBoard